

# 3 Port Direct Operated Poppet Solenoid Valve Rubber Seal

## Series VT307

### Compact yet provides a large flow capacity

Dimensions (W x H x D) ... 30 x 54.5 x 33 (Grommet)

C: 0.71 dm<sup>3</sup>/(s·bar)  
{Rc 1/4 (Passage 2 → 3)}

### Low power consumption

VT/VO307.....4.8 W DC/Standard type  
VT/VO307Y).....2 W DC/Energy-saving type  
VT/VO307W)

### Suitable for use in vacuum applications


-101.2 kPa  
(For vacuum specifications type: VT/VO307V, VT/VO307W)

### A single valve with 6 valve functions

(Universal porting type)  
Selective porting can provide 6 valve functions, such as N.C. valve, N.O. valve, Divider valve, Selector valve, etc.



### JIS Symbol



### How to Order

V T 307 [ ] 5 D [ ] 01 [ ] F

**Body type**

T	Body ported
0	Manifold

**Valve option**

Nil	Standard type
E*	Continuous duty type
Y*	Energy-saving type (2 W DC)
V*	For vacuum
W*	Energy-saving type, For vacuum

\* Option

**Rated voltage**

1	100 VAC, 50/60 Hz
2	200 VAC, 50/60 Hz
3*	110 VAC, 50/60 Hz
4*	220 VAC, 50/60 Hz
5	24 VDC
6*	12 VDC
7*	240 VAC, 50/60 Hz
9*	Other

\* Option

**Option**

F	With foot bracket
---	-------------------

**Thread type**

Nil	Rc
F	G
N	NPT
T	NPTF

**Port size**

Nil	Without port (For manifold)
01	1/8 (6A)
02	1/4 (8A)

**Light/Surge voltage suppressor**

Nil	None
S	With surge voltage suppressor (Grommet type is only available.) Refer to the figure below.
Z	With light/surge voltage suppressor (Except grommet type)

\* As for the case of rated voltage [Others (9)], please contact SMC.

Surge voltage suppressor mounting part

**Electrical entry**

G	Grommet, 300 mm lead wire
H	Grommet, 600 mm lead wire
D	DIN terminal
E	Grommet terminal
T	Conduit terminal

- V100
- SY
- SYJ
- VK
- VZ
- VT**
- VP
- VG
- VP
- S070
- VQ
- VKF
- VQZ
- VZ
- VS
- VFN

### Manifold

Model	Applicable manifold type	Accessory
VO307□	Common or individual exhaust	Function plate (DXT152-14-1A) <sup>Note</sup> Mounting screw (NXT013-3)

Note) It is not applied to "Continuous duty type". Refer to the accessories on page 4-7-5.

### Option

Description	Part no.
Bracket	DXT152-25-1A (With thread)

# Series VT307

## ⚠ Precautions

Be sure to read before handling.  
For Safety Instructions and Solenoid Valve Precautions, refer to page 4-18-2.

### ⚠ Caution

1. Make sure that dust and/or other foreign materials do not enter the valve from the unused port (e.g. exhaust port). Also, since there is a breathing port for the armature in the manual override part, do not allow accumulation of dust and/or other foreign materials to block bleed port.

### How to Calculate the Flow Rate

For obtaining the flow rate, refer to page 4-1-6.

## Standard Specifications

Type of actuation	Direct operated type 2 position single solenoid		
Fluid	Air		
Operating pressure range	0 to 0.9 MPa		
Ambient and fluid temperature	-10 to 50°C (No freezing. Refer to page 4-18-4.)		
Response time <sup>(1)</sup>	20 ms or less (at the pressure of 0.5 MPa)		
Max. operating frequency	10 Hz		
Lubrication	Not required (Use turbine oil Class 1 ISO VG32, if lubricated.)		
Manual override	Non-locking push type		
Mounting orientation	Unrestricted		
Shock/Vibration resistance <sup>(2)</sup>	150/50 m/s <sup>2</sup>		
Enclosure	Dustproof		
Electrical entry	Grommet, Grommet terminal, Conduit terminal, DIN terminal		
Coil rated voltage (V)	AC (50/60 Hz)	100, 200, 24°, 48°, 110°, 220°, 240°	
	DC	24, 6°, 12°, 48°, 100°	
Allowable voltage fluctuation	-15 to +10% of rated voltage		
Apparent power <sup>(3) (4)</sup>	AC	Inrush	12.7 VA (50 Hz) 10.7 VA (60 Hz)
		Holding	7.6 VA (50 Hz) 5.4 VA (60 Hz)
Power consumption <sup>(3) (4)</sup>	DC	Without indicator light: 4.8 W, With indicator light: 5 W	
Light/Surge voltage suppressor (Not applicable for grommet type)	AC	ZNR (Varistor), Neon bulb	
	DC	Diode, LED (Neon bulb for 100 V or more)	



\* Option

Note 1) Based on dynamic performance test, JIS B 8374-1981. (Coil temperature: 20°C, at rated voltage, without surge suppressor)

Note 2) Impact resistance: No malfunction occurred when it is tested with a drop tester in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 1000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

Note 3) At rated voltage

Note 4) The value is different for continuous duty type (VT307E), and energy-saving type (VT307Y/W). Refer to "Option" shown below.

## Flow Characteristics/Weight

Valve model	Port size	Flow characteristics												Weight
		1 → 2 (P → A)			2 → 3 (A → R)			3 → 2 (R → A)			2 → 1 (A → P)			
		C [dm <sup>3</sup> /(sbar)]	b	Cv	C [dm <sup>3</sup> /(sbar)]	b	Cv	C [dm <sup>3</sup> /(sbar)]	b	Cv	C [dm <sup>3</sup> /(sbar)]	b	Cv	
VT307	1/8	0.71	0.35	0.18	0.68	0.27	0.17	0.65	0.36	0.17	0.63	0.35	0.17	0.14 kg
VT307V (Vacuum spec. type)														
VT307E (Continuous duty type)														
VT307Y (Energy-saving type)														
VT307W (Energy-saving, Vacuum spec. type)	1/4	0.41	0.26	0.10	0.44	0.35	0.11	0.48	0.27	0.12	0.35	0.33	0.10	
VT307														
VT307V (Vacuum spec. type)														
VT307E (Continuous duty type)														
VT307Y (Energy-saving type)														
VT307W (Energy-saving, Vacuum spec. type)		0.71	0.31	0.19	0.71	0.25	0.17	0.68	0.33	0.17	0.71	0.26	0.18	
VT307														
VT307V (Vacuum spec. type)														
VT307E (Continuous duty type)														
VT307Y (Energy-saving type)		0.49	0.20	0.12	0.44	0.34	0.11	0.48	0.17	0.12	0.46	0.28	0.11	

Note) Values for a single valve unit. It differs in the manifold case. Refer to manifold specifications on page 4-7-5.

## Option

### Continuous duty type: VT307E

Exclusive use of VT317E is recommended for continuous duty with long time loading.

### ⚠ Caution

1. This model is for continuous duty, not for high cycle rates. But even in low cycle rates, if energizing the valve more than once a day, please consult with SMC.
2. Energizing solenoid should be done at least once in 30 days.

Specifications different from standard are as follows.

Apparent power/AC	Inrush	7.9VA (50 Hz), 6.2VA (60 Hz)
	Holding	5.8VA (50 Hz), 3.5VA (60 Hz)
Power consumption/DC	2 W, 2.2 W (With indicator light)	
Response time <sup>(1)</sup>	30 ms or less (at the pressure of 0.5 MPa)	

Note 1) Refer to "Response time" of standard specifications.

Note 2) For the flow characteristics, refer to "Flow Characteristics".

4-7-2

### Energy-saving type: VT307Y (VT307W)

If low power consumption is required for electronic control, "VY307Y(W)" (2 W DC) is recommended.

Specifications different from standard are as follows.

Power consumption/DC	2 W, 2.2 W (With indicator light) *
Response time <sup>(1)</sup>	25 ms or less (at 0.5 MPa)



\* 100 VDC: 2.4 W

Note 1) Refer to "Response time" of standard specifications.

Note 2) For the flow characteristics, refer to "Flow Characteristics".

### Vacuum spec. type: VT307V (VT307W)

This vacuum model has less air leakage than the standard model under low pressure. It is recommended for vacuum application.

### ⚠ Caution

1. Since this valve has slight air leakage, it can not be used for vacuum holding (including positive pressure holding) in the pressure container.

Specifications different from standard are as follows.

Operating pressure range	-101.2 kPa to 0.1 MPa
--------------------------	-----------------------

# 3 Port Direct Operated Poppet Solenoid Valve Rubber Seal Series VT307

## Construction

**De-energized**

**Energized**


**Operation principle <De-energized>**  
Spool valve ② is pushed upward by the return spring ③, port P ① is closed, and then port A ② and port R ③ are opened.  
Air flow direction:  
Port P ① ↔ Block, A ② ↔ R ③

**Operation principle <Energized>**  
When an electric current is applied to the molded coil ④, the armature ⑤ is attracted to the core ⑥, and through the push rod ⑦, it pushes down the spool valve ②. Then, port P ① and port A ② are connected. At this time, there will be gaps between the armature ⑤ and the core ⑥, but the armature will be magnetically attracted to the core ⑥.  
Air flow direction:  
Port P ① ↔ Port A ②, Port R ③ ↔ Block

**Component Parts**


No.	Description	Material	Note
①	Body	Aluminum die-casted	Color: Platinum silver
②	Spool valve	Aluminum, NBR	
③	Return spring	Stainless steel	
④	Molded coil	Resin	

## ⚠ Caution Light/Surge Voltage Suppressor

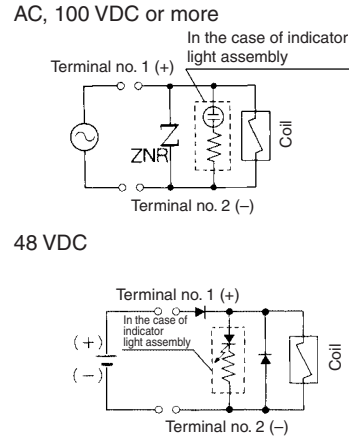

## Electrical Connection

DIN terminal and terminal (with light/surge voltage suppressor) are connected inside as in the figure below. Connect to the corresponding power supply.

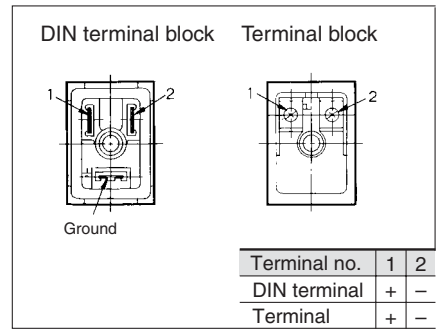

- Applicable cable O.D.  
Type T:  $\phi 4.5$  to  $\phi 7$  mm  
Type E:  $\phi 2.3$  to  $\phi 2.8$  mm  
Type D:  $\phi 6$  to  $\phi 8$  mm
- Applicable crimp terminal  
Type E/T: 1.25-3, 1.25-3S  
1.25Y-3N, 1.25Y-3S  
(Round or "Y" shaped crimped terminals) can be not used for type "D".

## Lead Wire Color

Voltage	Color
100 VAC	Blue
200 VAC	Red
DC	Red (+), Black (-)
Other	Gray

## How to Use DIN Terminal

### 1. Disassembly


- 1) After loosening the thread (1), then if the housing (2) is pulled in the direction of the thread, the connector will be removed from the body of equipment (solenoid, etc.).
- 2) Pull the screw (1) out of the housing (2).
- 3) On the bottom part of the terminal block (3), there's a cut-off part (9). If a small flat head screwdriver is inserted between the opening in the bottom, terminal block (3) will be removed from the housing (2). (Refer to "Figure 1".)
- 4) Remove the cable gland (4) and plain washer (5) and rubber seal (6).

### 3. Wiring

- 1) Passing through the cable (7), cable gland (4), plain washer (5), rubber seal (6) in this order, and then insert into the housing (2).
- 2) From the terminal block (3), loosen the screw (11), then pass the lead wire (10) through, then again tighten the screw (11).  
Note 1) Tighten within the tightening torque of  $0.5 \text{ N}\cdot\text{m} \pm 15\%$ .  
Note 2) Cable (7) external:  $\phi 6$  to  $\phi 8$  mm  
Note 3) Crimped terminal like round-shape or Y shape cannot be used.

### 3. Assembly

- 1) Passing cable gland (4), washer (5), rubber seal (6), housing (2) in this order through cable (7) and connect to terminal block (3) and then set the terminal block (3) to the housing (2). (Push it down until you hear the click sound.)
- 2) Putting rubber seal (6), plain washer (5), in this order into the cable introducing slit on the housing (2), then further tighten the cable gland (4) securely.
- 3) Insert the gasket (8) between the bottom part of terminal block (3) and a plug attached to equipment, and then screw (1) in from the top of the housing (2) to tighten it.  
Note 1) Tighten within the tightening torque of  $0.5 \text{ N}\cdot\text{m} \pm 15\%$ .  
Note 2) Connector orientation can be changed by 180 degrees depending on how to assemble the housing (2) and the terminal block (3).

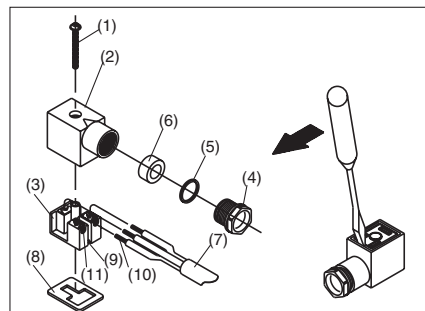

## Connector for DIN Terminal

Description	Part no.
DIN connector	B1B09-2A

V100

SY

SYJ

VK

VZ

VT

VP

VG

VP

S070

VQ

VKF

VQZ

VZ

VS

VFN









