

ORDER
ONLINE

SOLENOID VALVES . . .


COILS VOLTAGES & FREQUENCIES

The coil chart shows applicable voltages for various frequencies. Specify voltages and frequencies as listed below when ordering. Consult factory for voltages and frequencies not listed.


SERIES 15 COIL AND VOLTAGE CHART

A.C. VOLTAGES		D.C. VOLTAGES	CONDUIT ASSEMBLY COIL NO.	LEADWIRE ASSEMBLY COIL NO.	DIN* CONNECTOR ASSEMBLY COIL NO.
60 HZ.	50 HZ.				
8.4	7.7	5.0	15-17040-3	15-17039-3	*15-17034-3
4.8	4.4	3.0	15-17040-4	15-17039-4	*15-17034-4
9.7	8.9	6.0	15-17040-5	15-17039-5	*15-17034-5
12.0	11.0	8.0	15-17040-6	15-17039-6	*15-17034-6
19.5	18.0	12.0	15-17040-9	15-17039-9	*15-17034-9
24.0	22.0	16.5	15-17040-10	15-17039-10	*15-17034-10
38.0	35.0	24.0	15-17040-13	15-17039-13	*15-17034-13
43.0	40.0	28.0	15-17040-14	15-17039-14	*15-17034-14
76.0	70.0	48.0	15-17040-15	15-17039-15	*15-17034-15
120	110	82.0	15-17040-16	15-17039-16	*15-17034-16
61.0	56.0	38.0	15-17040-17	15-17039-17	*15-17034-17
100	91.0	68.0	15-17040-18	15-17039-18	*15-17034-18
240	220	165	15-17040-19	15-17039-19	*15-17034-19
277	255	180	15-17040-20	15-17039-20	*15-17034-20
141	127	102	15-17040-E17	15-17039-E17	*15-17034-E17
260	240	175	15-17040-E21	15-17039-E21	*15-17034-E21
26	24	17.0	15-17040-E10	15-17039-E10	*15-17034-E10
131	120	86.0	15-17040-E16	15-17039-E16	*15-17034-E16
48.0	45.0	30.0	15-17040-12	15-17039-12	*15-17034-12
208	187	140	15-17040-21	15-17039-21	*15-17034-21
58	53	36.0	15-17040-24	15-17039-24	*15-17034-24
214	194	125	15-17040-25	15-17039-25	*15-17034-25
155	140	107	15-17040-E18	15-17039-E18	*15-17034-E18


* Din Connector No. 50-17029 not included with coil

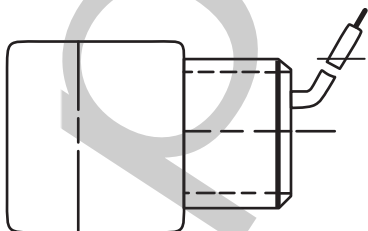

CONDUIT STYLE

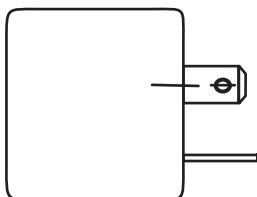

EUROPEAN STYLE

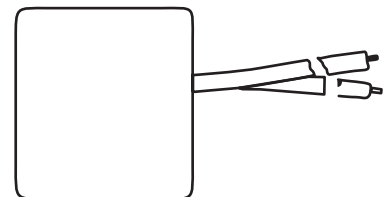

LEADED STYLE